



Planar DirectLight Pro Series

MicroLED Video Walls

- ▶ 0.9, 1.2, 1.5 and 1.8mm pixel pitches
- ▶ Featuring MicroLED technology
- ▶ 1,600-nit High Brightness Model with standard power consumption
- ▶ Low Power Model with standard 500-nit brightness
- ▶ Compatible with multiple controllers
- ▶ Planar® EverCare™ Lifetime Limited Warranty




Planar® DirectLight® Pro Series fine pixel pitch MicroLED video walls deliver beautiful imagery to suit a wide range of indoor, fixed installation applications. With pixel pitches from 0.9 to 1.8 millimeters, the TAA-compliant Planar DirectLight Pro Series delivers all the benefits of MicroLED technology as well as front serviceability and high bandwidth, reducing deployment complexity while maximizing efficiency.



Engrained Efficiency

Planar DirectLight Pro Series video walls are designed to offer a more efficient installation process, with fewer components needed while maintaining high visual quality. The use of larger 27" and double-tall 36" LED cabinets helps streamline the setup, reducing visible seams and making maintenance simpler.

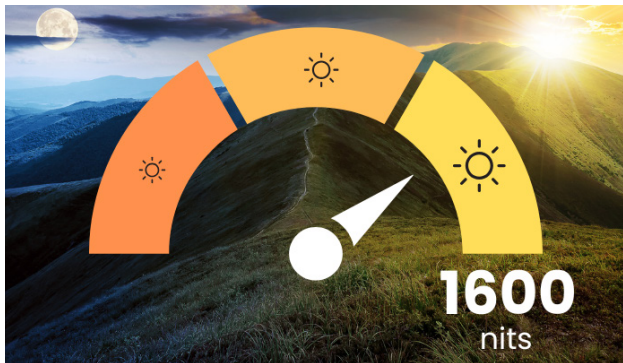


Brightness Meets Efficiency

High Brightness model built for maximum performance in high ambient light environments delivers 1,600 nits of sustained brightness with only 135 watts of power consumption.



Energy-Conscious Option

Low Power model delivers 500 nits of brightness with only 68 watts of power consumption, making it ideal for energy-conscious customers or applications with low ambient light conditions.

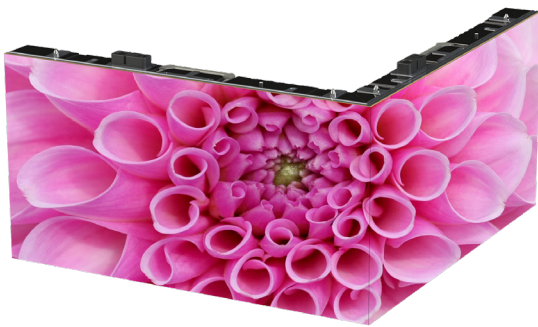

Turn the Corner

Display modules and cabinets have 45° beveled edges enabling video walls to wrap around 90° corners for unique installations, and opening the displays for use in more creative applications.



Flexible Control

Planar® WallDirector™ Video Controller offers robust default processing while compatibility with Brompton and Colorlight gives customers the freedom to choose the ideal solution for their application's unique requirements.



High Bandwidth

Most models offer 5x the bandwidth of competitive solutions, reducing total cost of ownership with fewer cabinets, cables and internal components like receivers and power supplies.



Lifetime Protection

Planar DirectLight Pro Series is protected by the Planar® EverCare™ Lifetime Limited Warranty which covers the whole display, everything from the sub-pixels to the video controller, for as long as it is used in a fixed location.

Configure a Video Wall

Planar DirectLight Pro Series video walls feature a modular design with display cabinets that stack like building blocks in any configuration. Create video walls with custom sizes, shapes, corners, curves and resolutions.

Full HD 1920 x 1080 **4K** 3840 x 2160 **8K** 7680 x 4320



Models	1 x 1	2 x 2	3 x 3	4 x 4	5 x 5	6 x 6	7 x 7	8 x 8	9 x 9	10 x 10	11 x 11	12 x 12
DLP 0.9	640 x 360	1280 x 720	1920 x 1080	2560 x 1440	3200 x 1800	3840 x 2160	4480 x 2520	5120 x 2880	5760 x 3240	6400 x 3600	7040 x 3960	7680 x 4320
DLP 1.2	480 x 270	960 x 540	1440 x 810	1920 x 1088	2400 x 1350	2880 x 1620	3360 x 1890	3840 x 2176	4320 x 2430	4800 x 2700	5280 x 2970	5760 x 3240
DLP 1.5	384 x 216	768 x 432	1152 x 648	1536 x 864	1920 x 1080	2304 x 1296	2688 x 1512	3072 x 1728	3840 x 2176	3840 x 2160	4224 x 2376	4608 x 2592
DLP 1.8	320 x 180	640 x 360	960 x 540	1280 x 720	1600 x 900	1920 x 1080	2240 x 1260	2560 x 1440	2880 x 1620	3200 x 1800	3520 x 1980	3840 x 2160

Video Wall Sizes												
Area (sq m)	0.21	0.82	1.85	3.29	5.14	7.41	10.08	13.17	16.67	20.58	24.90	29.63
Diagonal	27"	55"	82"	109"	137"	164"	191"	219"	246"	273"	301"	328"
Feet/Meters	1.1 x 2.0ft 0.3 x 0.6m	2.2 x 4.0ft 0.7 x 1.2m	3.4 x 6.0ft 1.0 x 1.8m	4.5 x 7.9ft 1.4 x 2.4m	5.6 x 9.9ft 1.7 x 3.0m	6.9 x 11.7ft 3.6 x 2.0m	7.8 x 14.0ft 2.4 x 4.2m	8.9 x 15.9ft 2.7 x 4.8m	10.1 x 17.9ft 3.1 x 5.4m	11.2 x 19.8ft 3.4 x 6.0m	12.2 x 21.8ft 3.7 x 6.7m	13.4 x 23.8ft 4.1 x 7.3m



Extended Ruggedness & Optics

Displays are available with Planar® ERO-LED™ (Extended Ruggedness and Optics™) protective coating that adds durability in high-traffic and interactive environments.



Enable Interactivity

Optimize video walls with a custom 32-point touch system and Planar ERO-LED. The touch solution is not limited to a 16:9 aspect ratio, opening the door to more sizes and shapes.



Always-On Reliability

Planar DirectLight Pro Series displays are designed for mission-critical environments where displays need to withstand extended or continuous operation day and night. Control rooms, hospitals and other applications that can't afford downtime benefit from exceptional performance 24x7.



Low-Power Standby Mode

When not in use, enable the video wall to enter a low power mode with the optional Planar® Smart Power Switch. The slim, LAN-connected AC switch fits behind the video wall displays and lowers power draw from each column of cabinets.

Specifications

Cabinet Model	DLP 0.9	DLP 1.2	DLP 1.5	DLP 1.8
Pixel Pitch	0.945mm	1.26mm	1.575mm	1.89mm
Display Technology	Direct View LED			
Contrast Ratio	1,000:1			
Brightness Uniformity	≥97%			
Color Uniformity	≥97%			
LED Refresh Rate	3,000			
Color Temperature Range (k)	3,000 - 10,000			
Cabinet Resolution	27" - 640 x 360 36" - 640 x 720	27" - 480 x 272 36" - 480 x 544	27" - 384 x 216 36" - 384 x 432	27" - 320 x 180 36" - 320 x 360
Pixel Density	1,119,789/sq m 10,4032/sq ft	629,882/sq m 58,518/sq ft	403,124/sq m 37,451/sq ft	279,947/sq m 26,008/sq ft
Brightness Max, Calibration On	500 or 1600 cd/sq			
Viewing Angle (50% Brightness)	>170° Horizontal; >170° Vertical			
Cabinet Size (W x H x D)	27" - 604.8 x 340.2 x 72.5mm 23.81 x 13.39 x 2.85in 36" - 604.8 x 680.4 x 72.5mm 23.81 x 26.78 x 2.85in			
Weight (Cabinet)	27" - 6.94kg 15.3lbs 36" - 13.2kg 29.1lbs			
HDR Support	Yes			
Installation & Service Access	Front, Planar tool supplied, Module Locking feature			
Runtime Duty Cycle (Hours/Day)	24 x 7			
LED Lifetime, Typical	100,000hrs			
Line Voltage	100-240V AC, 50/60hz			
Storage Temperature/ Humidity (degrees F/C)	-40° to 60° C -40° to 140° F 10-85% relative humidity, non-condensing			
Operating Temperature/ Humidity (degrees F/C)	-20° to 40° C -4° to 104° F 10-80% relative humidity, non-condensing			
Installation & Service Access	Front Access, module removal. All internal electronics accessible			
Supported Installation Types	Standard Flat Wall Forward Tilt: up to 10° 90° exterior corners Concave faceted curve			
Controller Compatibility	Planar WallDirector Video Controller Optional: Brompton & Colorlight			
Regulatory Compliance	NRTL UL 60950-1 TUV Rheinland, FCC Class A, CE EN60950-1, EN 55032 Class A and EN55024, WEEE, CISPR 32/2015			
Warranty	Planar EverCare Lifetime Limited Warranty (North America)			

Specifications may vary by model and selected video controller. This specification assumed Planar WallDirector Video Controller

For more information visit: www.planar.com/products/led-video-walls/planar-directlight-pro

Planar is a trademark of Planar Systems, Inc. All other trademarks and service marks are property of their holders. Copyright © 2024 Planar Systems, Inc. All rights reserved. This document may not be copied in any form without permission from Planar. Information in this document is subject to change without notice. 2/2025